

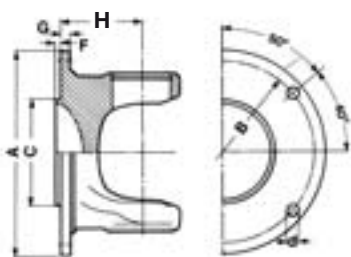
FLANGE DI ACCOPPIAMENTO - FLANGE YOKE
SAE


Fig. 1




Fig. 2



Fig. 3

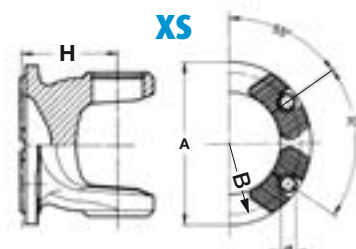


Fig. 8


DIN


Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 9

D x L	Serie	Tipo	FIG.	A	B	C	N° Fori	db13	F	G	H	βmax	COD. TRASMEC
18 x 47	1018	DIN 58	4	58	47	30	4	5	2	4	37	28°	FL 37.58.4.5
		DIN 65	4	65	52	35	4	6	2,8	4	37	28°	FL 37.65.4.6
23,8 x 61,3	1024 (1120)	SAE 1120	1	87,5	69,85	57,15	4	8	1,6	5,5	33	20°	FL 33.88.4.8
		DIN 75	4	75	62	42	4	8	2	5,5	42	25°	FL 42.75.4.8
		DIN 75	5	75	62	42	6	6	2	5,5	42	25°	FL 42.75.6.6
		DIN 90	4	90	74,5	47	4	8	2,5	6,5	33	20°	FL 33.90.4.8
27 x 74,6	1027 (1300) ÷ 1015 (687 15)	SAE 1120	1	87,5	69,85	57,15	4	8	1,6	8	50	28°	FL 50.88.4.8
		SAE 1300	1	97	79,37	60,32	4	10	1,5	8	50	28°	FL 50.97.4.10
		SAE 1410	1	116	95,27	69,85	4	12	1,6	8,5	43	25°	FL 44.116.4.12
		DIN 90	4	90	74,5	47	4	8	2,8	7	50,5	28°	FL 50.90.4.8
		DIN 100	5	100	84	57	6	8	2,5	7	50,5	28°	FL 50.100.6.8
		DIN 120	6	120	101,5	75	8	10	2,7	8	43	25°	FL 43.120.8.10
27 x 81,7	1028 (1310)	SAE 1300 B	1	97	79,37	60,32	4	10	1,5	6,7	35	18°	FL 36.97.4.10
		SAE 1300	1	97	79,37	60,32	4	10	1,4	7,5	46	25°	FL 44.97.4.10
		DIN 120	6	120	101,5	75	8	10	2,5	8	52	25°	FL 53.120.8.10
		DIN 100	6	100	84	57	6	8	2,5	7	53	25°	FL 53.100.6.8
30,2 x 81,8	1020 (687 20)	SAE 1300	1	97	79,37	60,32	4	10	1,4	7	54	30°	FL 54.97.4.10
		SAE 1300 w	1	97	79,37	60,32	4	10	1,4	8	58,5	35°	FL 58.97.4.10
		SAE 1410	1	116	95,27	69,85	4	12	2,1	8	54	30°	FL 54.116.4.12
		DIN 100	5	100	84	57	6	8	2,6	7	54	30°	FL 54.100.6.8
		DIN 120	6	120	101,5	75	8	10	2,6	8	54	30°	FL 54.120.8.10
		XS 120	8	120	100	-	4	11	-	-	54	30°	FL 54.120.4.11
		DIN 100	6	100	84	57	8	8	3	7	54	30°	FL 54.100.8.8
30,2 x 106,3	1030 (1410)	SAE 1410	1	-	95,27	69,85	4	12	1,5	8	43	20°	FL 43.116.4.12
		DIN 100	5	100	84	57	6	8	2,5	8	68	28°	FL 65.100.6.8
		DIN 120 B	6	120	101,5	75	8	10	2,8	8	56	18°	FL 56.120.8.10
		DIN 120	6	120	101,5	75	8	10	3	8,5	68	20°	FL 70.120.8.10
34,9 x 92	1025 (687 25)	SAE 1510	1	151	120,67	95,25	4	14	1,7	10	60	25°	FL 60.156.4.14
		DIN 150	6	150	130	90	8	12	3,1	10	60	25°	FL 60.150.8.12
34,9 x 106,4	1034 (687 30)	SAE 1510 B	1	146	120,67	95,25	4	14	1,5	10	50,8	20°	FL 51.156.4.14
		DIN 120	6	120	101,5	75	8	10	2,5	8	65	30°	FL 65.120.8.10
		SAE 1510	1	146	120,67	95,25	4	14	1,5	10	78	30°	FL 78.156.4.14
		SAE 1600	2	174,6	155,52	168,22	8	9,7	3,5	9,5	60	30°	FL 60.174.8.9
		DIN 150	6	150	130	90	8	12	3,1	10	78	30°	FL 78.150.8.12
		XS 120	8	120	100	-	4	11	-	-	63,5	30°	FL 63.120.4.11


FLANGE DI ACCOPPIAMENTO - FLANGE YOKE
SAE


Fig. 1




Fig. 2



Fig. 3

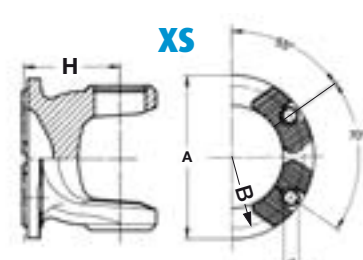


Fig. 8


DIN


Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 9

D x L	Serie	Tipo	FIG.	A	B	C	N° Fori	dB13	F	G	H	β _{max}	COD. TRASMEC
39,7 x 115,9	1039 (1510)	SAE 1410	1	-	95,27	69,85	4	12	2	9	50	20°	FL 50.116.4.12
		SAE 1510 B	1	-	120,67	95,25	4	14	2	9	40	10°	FL 40.156.4.14
		SAE 1510	1	146	120,67	95,25	4	14	1,6	9,5	63,5	20°	FL 63.156.4.14
		SAE 1510 A	1	-	120,67	95,25	4	14	1,7	9,5	60	25°	FL 70.156.4.14
		DIN 120	6	120	101,5	75	8	10	3,1	8	72	28°	FL 72.120.8.12
		DIN 150	6	150	130	90	8	12	3,3	10	75	28°	FL 72.150.8.12
42 x 117,5	1042 (0148)	DIN 120	6	120	101,5	75	8	10	2,8	8	73	25°	FL 73.120.8.10
		DIN 150	6	150	130	90	8	12	3	10	76	25°	FL 73.150.8.12
		DIN 180	6	180	155,5	110	8	12	3,8	10	65	20°	FL 65.180.8.12
47,6 x 135,2	1040 (687 40)	SAE 1600	2	174,6	155,52	168,22	8	10	3,6	9,5	93	25°	FL 93.176.8.10
		DIN 150	6	150	130	90	8	12	3,3	10	90	25°	FL 91.150.8.12
		XS 150	8	150	130	-	4	13	-	-	82	25°	FL 82.150.4.13
		XS 180	8	180	150	-	4	15	-	-	82	25°	FL 82.180.4.15
48 x 116,5	1048 (587 20)	SAE 1600	2	174,6	155,52	168,22	8	10	2,3	11	85	25°	FL 85.176.8.10
		DIN 150	6	150	130	90	8	12	3	10	86	25°	FL 96.150.8.12
52 x 133	1052 (587 30)	SAE 1600	2	174,6	155,52	168,22	8	10	2,3	10,5	81,5	30°	FL 83.176.8.10
		DIN 150	6	150	130	90	8	12	3,3	10,5	89,5	35°	FL 90.150.8.12
		DIN 165	6	165	140	95	8	14	3,1	12	90	35°	FL 90.165.8.14
		DIN 180	6	180	155,5	110	8	14	3,3	12	96	35°	FL 98.180.8.14
		DIN 180	7	180	155,5	110	10	16	3,3	12	90	35°	FL 90.180.10.16
52 x 147,2	1045 (687 45)	SAE 1800	3	203,2	184,2	196,8	12	10	3,2	12,5	95	25°	FL 86.203.12.10
		XS 180	8	180	150	-	4	15	-	-	117	30°	FL 117.180.4.15
		DIN 180	6	180	155,5	110	8	14	3	12,5	95	30°	FL 95.180.8.14
53 x 135	1089 (389)	DIN 165	6	165	140	95	8	14	3,1	12	90	30°	FL 91.165.8.14
		XS 150	8	150	130	-	4	13	-	-	85	30°	FL 85.150.4.13
57 x 144	1057 (587 35)	SAE 1800	3	203,2	184,2	196,8	12	10	3,2	12,5	104	30°	FL 98.204.12.10
		DIN 180	6	180	155,5	110	8	4	3	12	100	30°	FL 100.180.8.14
57 x 152	1057 L (587 42) ÷ 1055	DIN 180	7	180	155,5	110	10	16	3,4	14	100	30°	FL 100.180.10.16
		DIN 180	6	180	155,5	110	8	14	3,4	14	96	25°	FL 96.180.8.14
		DIN 225	6	225	196	140	8	16	5	15	96	30°	FL 96.225.8.16
		DIN 225	9	225	196	140	12	16	5	15	96	30°	FL 96.225.12.16
		XS 180	8	180	150	-	4	15	-	-	92	30°	FL 92.180.4.15
59 x 167,4	1800	DIN 225	6	225	196	140	8	16	5	16	96	30°	FL 95.225.8.16
65 x 172	1065 (687 65)	DIN 180	7	180	155,5	110	10	16	2,9	14	110	25°	FL 110.180.10.16
		DIN 225	6	225	196	140	8	16	5	15	110	25°	FL 110.225.8.16
		DIN 250	6	250	218	140	8	18	6	18	110	25°	FL 110.250.8.18
		XS 180	8	180	150	-	4	15	-	-	105	25°	FL 105.180.4.15